



ARISTON



AURES SLIM MULTI

ELECTRIC INSTANTANEOUS
WATER HEATER

HOT WATER | HEATING | RENEWABLES
ariston.com/uk

AURES SLIM MULTI FEATURES AND BENEFITS



ADVANCED PERFORMANCE

- / Multi-point model to supply multiple water outlets at the same time
- / Flow sensor system initiates instantaneous water heating when a tap is opened

MAXIMUM COMFORT

- / Front facing dial and LED indication for ease of operation
- / 4-step dial to set the desired power level
- / Easy to maintain with frontal access to all internal components

PEACE OF MIND

- / Complete safety thanks to the double thermal cut-out

ITALIAN DESIGN

- / Premium Italian design
- / Elegant brushed effect front panel
- / Sleek cover of water inlet and outlet pipes
- / Space saving thanks to its compact size



MULTI POINT



DOUBLE SAFETY THERMOSTAT



ENERGY EFFICIENT



COMPACT SIZE



EASY INSTALLATION



ITALIAN DESIGN



EXTERNAL POWER REGULATION



2 YEARS WARRANTY AVAILABLE



INSTANT HOT WATER THE ULTIMATE ENERGY EFFICIENT SOLUTION

No more time and energy waste while waiting for hot water.

Aures is the most efficient way to provide hot water at the point of use. Instead of pre-heating and storing water in a tank, hot water is ready as soon as the tap is opened; an effective approach to eliminate heat loss and reduce energy consumption.

As a result, it boasts **ErP energy class 'A'**, the top level of energy efficiency in the instant electric water heating sector.

Get ready to enjoy the pleasure of instant hot water.



AURES SLIM MULTI INSTANTANEOUS WATER HEATER

BRUSHED EFFECT FRONT PANEL

PREMIUM ITALIAN DESIGN



FRONT FACING DIAL


COVER OF INLET & OUTLET PIPES



1. LEDs indicate power level

2. Ergonomic dial with three power settings: LOW (4.5kW), MEDIUM (5kW), HIGH (9.5kW)

PRODUCT DIMENSIONS

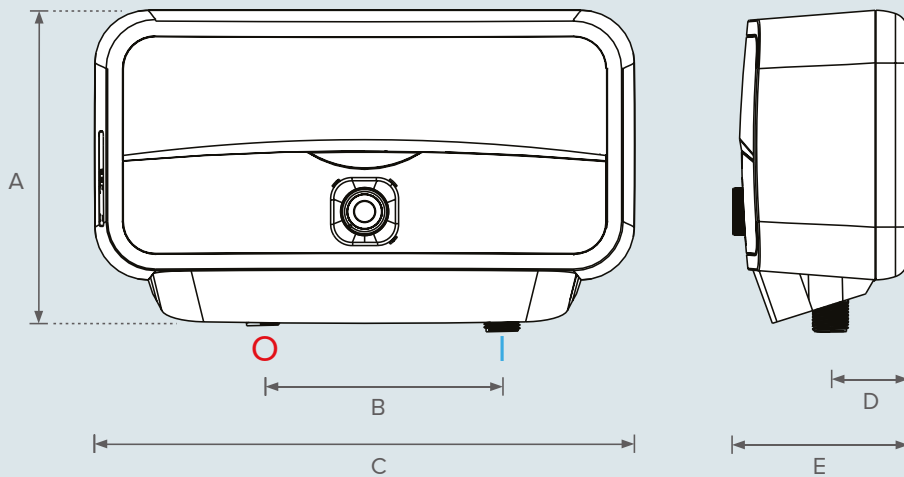

SM 9.5 240V EU	
A	178mm
B	135mm
C	304mm
D	45mm
E	98mm

LEGEND

- | Cold water inlet G 1/2"
- Hot water outlet G 1/2"

AURES SM 9.5

Description	9.5 240V EU
Voltage (V) On Tech Label	240
Power (kW)	9.5kW
Step Power (kW)	4.5+5
Phase	Mono
Ampere	39.6
Frequency (Hz)	50/60Hz
Safety Valve (Y/N)	Y
Heating Element	Copper
Inner Tank Type	Plastic
Water Connection Size (inch/BSP)	1/2" BSP
Min Flow Rate (L/min)	2.1
Max Working Pressure (bar)*	8
IP Protection Degree	IP24
Max Working Temperature (°C)	55
ERP Rating	A
Tapping Profile	XS
PRODUCT CODE	3520028

UNLIMITED HOT WATER IN AN INSTANT WHEREVER YOU NEED IT

BATHROOMS	KITCHENS	ANNEXES	SMALL BUSINESSES	LOFT CONVERSIONS
LOG CABINS	UTILITY ROOMS	GARAGES & WORKSHOPS	CONSERVATORIES	EXTENSIONS

HOT WATER | HEATING | RENEWABLES

Sales: salesoffice@aristonthermo.com / 0333 240 6666

Customer Service: customer.service.uk@aristonthermo.com / 0333 240 8777

ariston.com/uk

[@AristonUK](https://www.instagram.com/AristonUK)
[/AristonUK](https://www.facebook.com/AristonUK)
[/AristonThermo](https://www.youtube.com/AristonThermo)
[/AristonUK](https://www.instagram.com/AristonUK)

