

PAC N90 ECO



SILENT

DE'LONGHI COMFORT

AIR-TO-AIR PORTABLE CONDITIONERS

- Maximum cooling capacity
- Low Energy Consumption
- Silent Technology
- Eco-friendly gas

9.800 Btu/h*
Class A
50% more Silent
R290

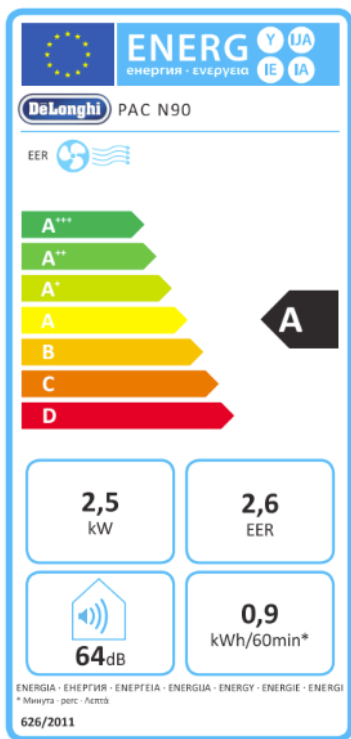

EFFICIENCY

NEW ECO-DESIGN

700 TIMES ECO-FRIENDLY

SILENT TECHNOLOGY

SOFT TOUCH CONTROL PANEL



Better Everyday

* 35°C/80% R.H.

*** 696 times compared to the impact of Global Warming of R410-F

** 35°C/40% R.H. (EN14501) Reg. 517/2014.

**** Tested in our laboratory by comparing the maximum sound level using max. fan

PAC N90 ECO

SILENT


DE'LONGHI COMFORT

AIR-TO-AIR PORTABLE CONDITIONERS

- Maximum cooling capacity
- Low Energy Consumption
- Silent Technology
- Eco-friendly gas

9.800 Btu/h*
Class A
50% more Silent
R290

- Fan function
- Dehumidifying function
- Exclusive condensate recirculation system
- 3 fan speed to select the maximum power or the minimum noise
- Soft touch control panel
- Remote control allows an easy use of all features
- 12 h electronic timer and thermostat
- Handles and castors for easy transportation



EFFICIENCY

Perfect match of most advanced technology and low consumption, Pinguino PAC N90 ECO SILENT achieves **A class of Energy Efficiency**.

NEW ECO-DESIGN

Featuring a stylish and innovative design, Pinguino PAC N90 ECO SILENT is kind to the environment

700 TIMES ECO-FRIENDLY

Pinguino PAC N90 ECO SILENT uses the **refrigerant gas R290**, which is up to 696 times more environmentally friendly than traditional gases***

SILENT TECHNOLOGY

The silence of power. Pinguino Silent, up to 50% MORE SILENT**** thanks to DL technology

SOFT TOUCH CONTROL PANEL

PAC N90 ECO SILENT has an user-friendly soft-touch control panel for an easy use of all desired functions.

TECHNICAL DATA

Maximum cooling capacity	BTU/h* – Kw**	9.800 – 2,5
Energy Efficiency Ratio (EER)	(W/W)	2,6
For rooms up to	m ³	85
Refrigerant gas		R290
Energy Efficiency Class		A
Rated voltage – frequency	V~Hz	220-240~50
Input power**	W	940
Maximum sound power level	dB(A)	64
Noise pressure level (min-max)	dB(A)	50-52
Air flow(min-med-max)	m ³ /h	250-310-350
Max dehumidifying (dehum. mode)	l/24h	34
Dimensions (hxlxp)	mm	750x449x395
Weight	Kg	30

* 35°C/80% R.H.

** 35°C/40% R.H. (EN14511)

***696 times compared to the impact of Global Warming of R410 - F-Gas Reg. 517/2014. Laboratory by

comparing the maximum sound level using max. fan speed vs sound level with min. fan speed





ENERG
енергия · ενέργεια



DeLonghi PAC N90

EER



2,5
kW

2,6
EER

64dB

0,9
kWh/60min*

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI
* Минута · релс · λεπτά

626/2011

5415116271_00/1018