

Jupiter De-Stratification Unit

- Available in two sizes
- Speed controllable
- High velocity fans
- Supplied with a grey coated finish - other colours available to special order
- Available with built-in thermostat



Air Movement Fans

The Vent-Axia Jupiter range of de-stratification units is based on direct drive axial fans, housed in a neat and sturdy casing complete with eyebolts for suspension from chains or steel wires. Ideal for applications where the proposed mounting height requires higher velocity fans or where open bladed ceiling fans are considered unsuitable. Jupiter fans can be used in stores, warehouses, factories, workshops, as well as many other industrial applications. The unit provides effective and positive air movement to improve the working environment, particularly during summer months. In addition Jupiter fans can be used during the winter to re-circulate hot air from ceilings and roofs down to living and working areas.

Electrical

Supply voltage 220-240V/1/50Hz. Direct drive axials with speed controllable motors. The motor hub and impeller are statically and dynamically balanced for smooth operation and optimum performance. Class F insulation, suitable for operating in atmospheres of up to 95% RH and ambient temperature of up to +60°C.

General Installation

For cooling effect, circulation of air is required in any given area. As a guide, mount Jupiter fans 4.5-6m apart, in tropical climates 3m apart. Fans should be mounted so that they do not interfere with lighting installations in any way. Mount fans away from walls or pillars where possible to avoid obstruction of airflow.

Heat Saving

Heat savings are largely dependent on the difference between the roof level and the working level temperatures, the ventilation rate and the geographical position.


Models

Model	Stock Ref
NJUP315	457485
NJUP315CTS	457486
NJUP400	457487
NJUP400CTS	457488

Accessories

Model	Stock Ref
Speed Controller	RTRE20
ThermoSwitch	563502
Suspension Pack	457490

Dimensions (mm)

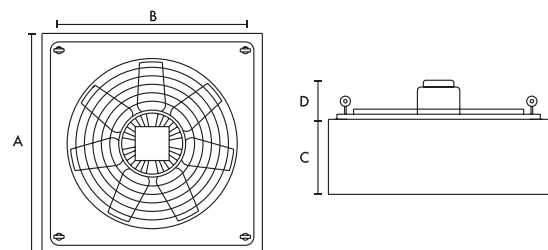

Size	A	B	C	D	Weight
315	500	380	200	84	11 kg
400	620	490	200	93	16 kg

Performance

Models	Duty CFM	Speed m ³ /s	dB(A) RPM	220/240V/50Hz/1Ph @3M	kW	FLC	SC	Max Mounting Height	
								Feet	Metres
NJUP315/CTS	1290	0.610	1380	45	0.15	0.70	2.50	44	13.4
NJUP400/CTS	3000	1.415	1320	51	0.35	1.60	5.50	72	22.0