

IRXE Infrared Heater



	Technical Details
Controls	Half Heat/Full Heat/Off
UI	Pull-cord mechanical switch: half-heat/full-heat/off
Construction	Durable epoxy-polyester powder coated steel rear casing (Pantone 422C) with anodised steel front casing
Element	Quartz element
Installation	Supplied with wall mounting bracket. Reflector angle adjustable on installation and lockable
Safety	No cut-out on-board. Protection via RCD
IP Rating	IP24
Supply	1.3 metres fitted, 3 core for fused spur installation, 1/N/PE ~230-240V, 50Hz Class I, with earth wire
Colour / Finish	Silver grey

Warranty & Approvals		
Approvals	CE, BEAB	
Warranty	2 Years	
Country of Origin	China	
Manufacturer	Glen Dimplex Heating & Ventilation (GDC Group Ltd)	


Product Description

IRXE infrared wall heater is a safe, practical source of heat in bathrooms, kitchens and work areas—anywhere where fast localised heating is required

Key Features

- Choice of heat outputs (0.6/1.2kW)
- Designed to provide rapid beamed warmth
- All models have adjustable beam angle to direct heat where it's needed
- IP24 rated
- Pull cord operation
- Silver grey finish

Dimensions

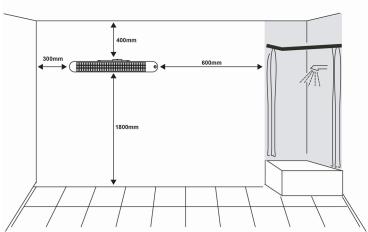

,	,		
Mode/Item No.(EAN-Code 5011139+Item No.)	060587		
	IRX60/120E		
Output (kW)	0.60 / 1.20		
Height (mm)	114		
Width (mm)	764		
Depth (mm)	93		
Weight (kg)	2		
Packaging Details			
Height (mm)	115		

Раскад	ing Details
Height (mm)	115
Width (mm)	820
Depth (mm)	125
Packed Weight (kg)	2
Ti	24
Hi	5
Pallet Quantity (2.4m high)	96